



DOUBLE HUNG TRANSOM

Transom Units

MO (mm)	1-10 (559)	2-2 (660)	2-6 (762)	2-8 (813)	2-10 (864)	3-0 (914)	4-0 (1219)
RO (mm)	1-10 1/2 (572)	2-2 1/2 (673)	2-6 1/2 (775)	2-8 1/2 (826)	2-10 1/2 (876)	3-0 1/2 (927)	4-0 1/2 (1232)
Frame Size (mm)	1-9 1/2 (546)	2-1 1/2 (648)	2-5 1/2 (749)	2-7 1/2 (800)	2-9 1/2 (851)	2-11 1/2 (902)	3-11 1/2 (1207)
DLO (mm)	1-3 11/16 (398)	1-7 11/16 (500)	1-9 11/16 (551)	1-11 11/16 (602)	2-3 11/16 (703)	2-5 11/16 (754)	3-5 11/16 (1059)

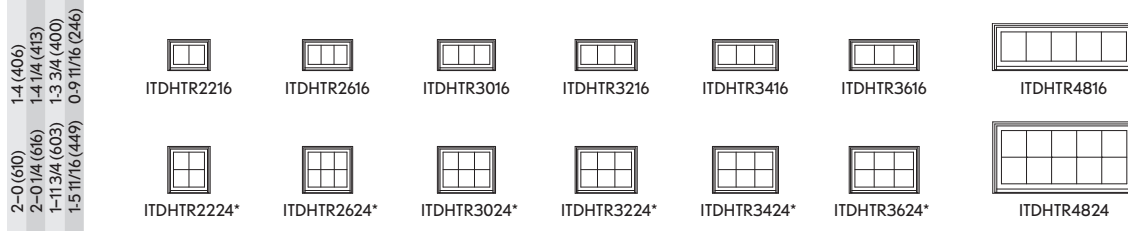


MO (mm)	3-2 (965)	3-6 (1067)	4-2 (1270)	4-6 (1372)	5-2 (1575)
RO (mm)	3-2 1/2 (978)	3-6 1/2 (1080)	4-2 1/2 (1283)	4-6 1/2 (1384)	5-2 1/2 (1588)
Frame Size (mm)	3-1 1/2 (953)	3-5 1/2 (1054)	4-1 1/2 (1257)	4-5 1/2 (1359)	5-1 1/2 (1562)
DLO (mm)	2-7 11/16 (805)	2-11 11/16 (906)	3-7 11/16 (1110)	3-11 11/16 (1211)	4-7 11/16 (1414)

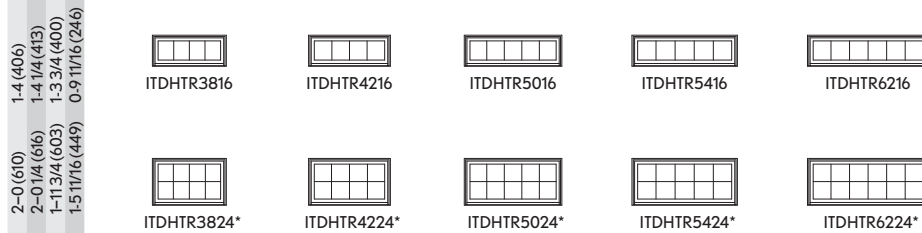

In-Sash Transoms Mullered Over Double Hungs

MO (mm)	1-10 (559)	2-6 (762)
RO (mm)	1-10 1/2 (572)	2-6 1/2 (775)
Frame Size (mm)	1-9 1/2 (546)	2-5 1/2 (749)

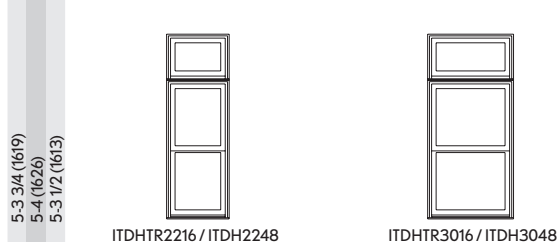

MULTIPLE ASSEMBLIES

Multiple assemblies can be factory mullered.

MAXIMUM ROUGH OPENING not to exceed 113 1/2" x 76 1/4" Maximum up to 5 units wide by 1 unit high, or 2 units wide by 2 units high.

MAXIMUM ROUGH OPENING not to exceed 84" x 92" Maximum up to 3 units wide by 5 units high.

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Integrity® from Marvin® representative for more information.

Details and Elevations not to scale.

Special sized units available within product size matrix and available down to 17.5" frame width. See your Integrity® retailer.

Optional picture Grilles, GBGs and SDLs are available in a standard Rectangular cut shown. Also available in Prairie lite cuts shown on page 49.

When ordering 6 9/16" (167 mm) or 6 13/16" (173 mm) jambs, add 1/4" (6 mm) to width and 1/8" (3 mm) to height for Rough Opening, Frame Size and Masonry Opening.

* Size available in picture unit also.

Construction Details

